

“Flat Sat Easy –  
the Satellite System  
for use with YOUR Receiver”



Installation manual  
with pictures





1

- Tools
- 1.Silicon adhesive
  - 2.drill
  - 3.pencil
  - 4.tape measure
  - 5.scissors

place the metal base plate on the roof of the vehicle. Ensuring the area is complete clean



2



3

Add silicon adhesive to the underside of the base plate

Push the base plate down onto the roof to ensure good adhesion



4



5

Decide where cables will go through the roof, then drill hole

Locate the motor unit of the antenna onto the base plate



6



7

Tighten the nuts onto the four screws

The power and co-axial cables from the motor unit must be fully protected by a suitable conduit or cover (not supplied)



8





9

Position cable inlet seal over the hole




10

Pass the cables through the inlet seal



11

Glue the inlet seal to the roof in the same manner as the base plate

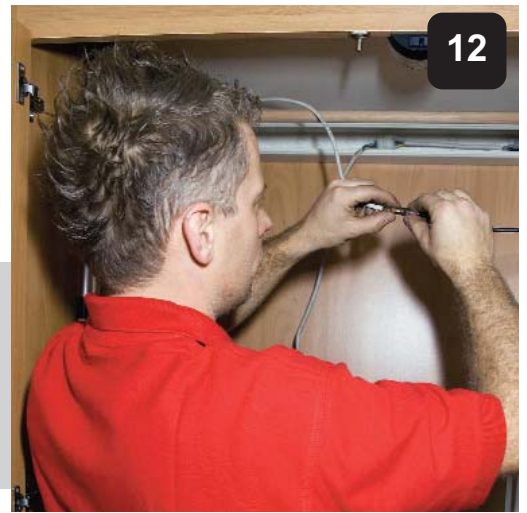

12

Connect the motor cable and co-axial cable extensions



13

Pass the cables through the internal conduit of the vehicle



14

Close the covers of the conduit



15

Connect the power supply and the co-axial cables coming from the motor unit to the control box



16

The connection on the back of the control box (Super Digital only)



17

Power the system up, and stop the motor unit when the dish arm is in a vertical position. Place the dish onto the dish arm ensuring holes are correctly aligned

Fix the dish on the arm using the steel nuts and bolts supplied



18



19

Follow the instructions appearing on the screen to configure the system correctly

At the end of the installation the antenna should look like this.



20



21

**Telair**  
AIR CONDITIONER